


ITA22

BATTERY STRAPPING TOOL FOR POLYPROPYLENE AND POLYESTER STRAP WITH VIBRATION SEALING

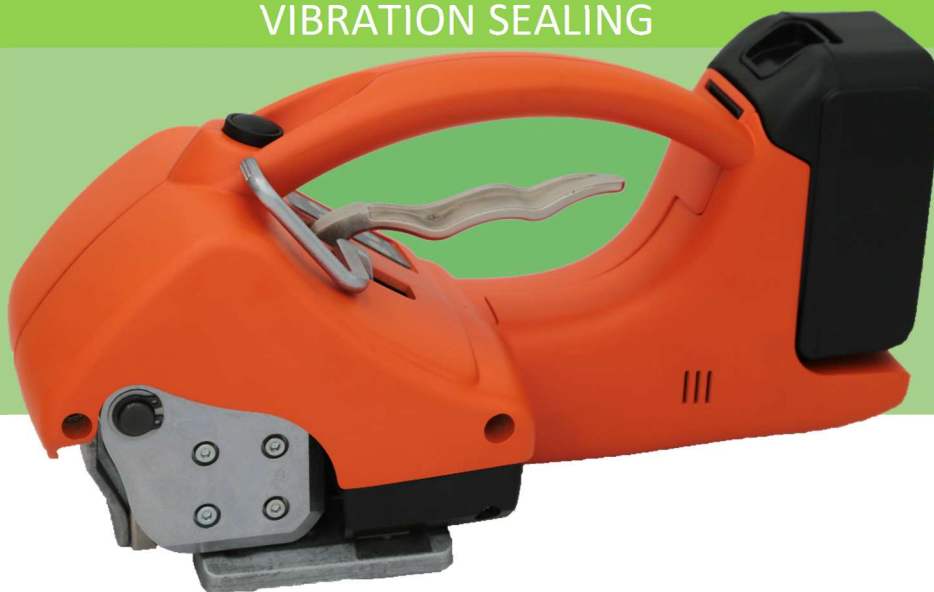

TECHNICAL SPECIFICATIONS

DIMENSIONS

Length 316 mm – 12.44"

Width 140 mm – 5.51"

Height 160 mm – 6.30"

Weight 3.8 Kg – 8.8 lbs

FEEDING

Battery 14.4 V – 3 Ah Li-ion

PERFORMANCE

Max. tension force 1500N

Tensioning speed 8 mt/min

Sealing Vibration Sealing

Joint strenght 75% of breaking strenght

MODEL

CODE	TYPE	STRAP	THICKNESS
T229997	ITA22 with one battery	PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63"	0,5÷1.05mm – 0.02"÷0.04" 0,5÷0,7mm – 0.02"÷0,03"
T2299971	ITA22 with one battery and charger	PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63"	0,5÷1.05mm – 0.02"÷0.04" 0,5÷0,7mm – 0.02"÷0,03"
T2299972	ITA22 with two battery and charger	PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63"	0,5÷1.05mm – 0.02"÷0.04" 0,5÷0,7mm – 0.02"÷0,03"

POLYESTER STRAP



POLYESTER STRAP

